


Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

The **NTCL-RD-6W-12CM** is a compact versatile surface luminaire ideal for hard to light spaces.

Application:	Surface, ceiling, wall (interior)
Light color:	4100K Natural white 3500K Warm white
Fixture finish:	Surface in white, electrostatic powder coated
Fixture material:	Aluminum
Diffuser:	White acrylic lens
Optic:	180° beam angle
Voltage:	12VDC
Lamp life:	>50,000 hours L ₇₀
Maximum wattage:	6 Watts
Fixation:	3 Hole bracket (can fit over an electric box)
Certification:	Conforms to ANSI/UL standard UL-2108 Certified to CAN/CSA standard 22.2-9.0
Power supply class II recommended::	
NTLD-350A	for one (1) luminaire
NTPV20-12	For two (2) luminaires
NTPV60-12	For up to maximum nine (9) luminaires

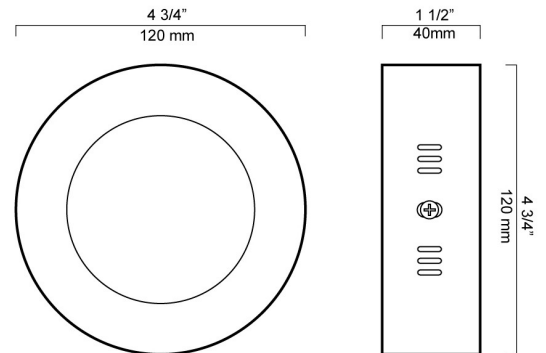

Ordering Matrix / Specification

Model	Wattage	Color	Dimension
NTCL-RD	6W	41 (4100K) 35 (3500K)	12CM



Natech Industrie

3154 boulevard Industriel, Laval, QC, H7L 4P7 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, info@natechlighting.com

This specification is valid as of 2015-08 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.