

Project :

Date :

Cat. No :

Type :

Notes :


Volts :

Application :

The waterproof LED modules **NTM-05W3-XX-12V** and **NTM-RGB-12V** are perfectly suited for a number of exterior applications and interior where a light accent is needed.

The light modules heat production permits applications directly on wood, plexiglas or other types of plastics, glass surfaces or any clean non porous surface.

- Backlighting or signage lighting.
- Alternative for fluorescent
- Decor for hotels, restaurant, bars, etc.

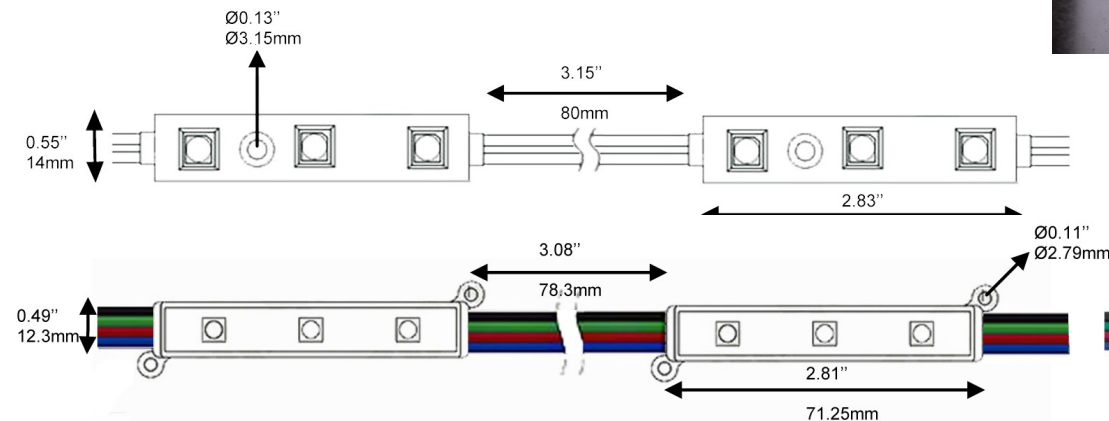

NTM-05W3-XX-12V (one color)



NTM-RGB-12V (changing color RGB)

Characteristics :

- Standard voltage 12VDC
NTM-05W3-XX-12V: 1.2 Watts per module
NTM-RGB-12V: 0.75 Watts per module
- Maximum length per circuit:
NTM-05W3-XX-12V : 25 modules
NTM-RGB-12V: 50 modules
- 120° degrees beam
- 50,000 hours
- IP65 standard
- **Working temperature:**
Min -40°C/+50°C Max.
- Mounting : Adhesive 3M film backing or screw
- Can be cut every module see dimensions

Options :

- Dimming available, consult factory
- Controller available pour RGB module, consult factory

Ordering Matrix / Specification

Model	Module	Color	Voltage
NTM	05W3		12V
		WH white (5000K)	
		WW warm white (3000K) RGB	

The module must be connected to a low voltage output power supply according to selected voltage and power criteria

Natech Industrie

3154 boulevard Industriel, Laval, QC, H7L 4P7 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, info@natechlighting.com

This specification is valid as of 2015-08 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.