

Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

Applications :


NTUTS60 flexible linear source offers a high power **lateral light projection** to provide accent lighting in multiple types of installations:

- Create a decor or set a mood with a light luminous touch or a incove or architecture light presence.
- Integrated task lighting, under cabinet lighting for studios or use it in merchandising showcases, shelving or in custo furniture projects.

The **NTUTS60** must absolutely be installed on a surface that allows heat dissipation or it must be inserted in one of our many LEDBAR aluminum profiles available to allow heat transfer and thermal management.

Do not apply directly on wood, plexiglas or other types of plastics and glass surfaces. This product must be applied on a surface where heat and temperature can create constraint.

Consult our technical specs sheets to select one of our LEDBAR architectural linear profile.

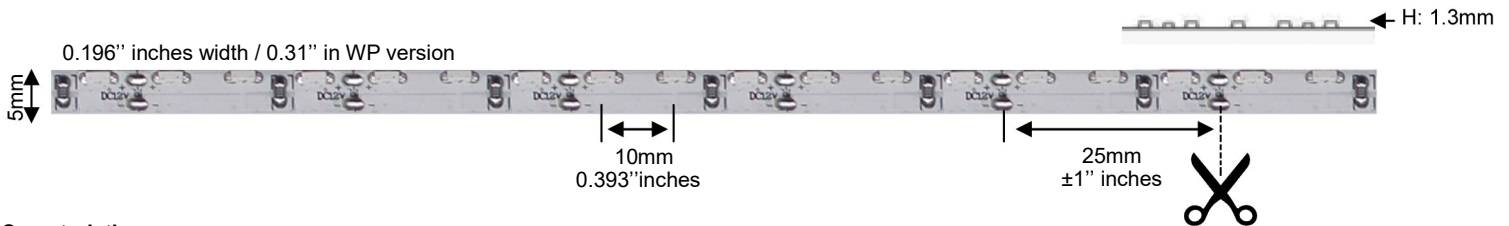

Characteristics :

- 120 diodes per meter/36 per foot
- 14.4 Watts per meter/4.43 W per foot
- Voltage 12VDC standard.
- 24 VDC on demand
- 5 meters/16'4" maximum lenght per circuit
- 120° degrees beam
- 60,000 hours L80.
- **IP22** standard
- **Operating Temperatures:**
Min -40°C/+50°C Max.

Linear Source Dimensions :

- 5 mm (0.20") wide X 1.3mm (0.05") high
- IP67 version 8mm (0.31") wide.
- Lenght : 5 meters (16'4") per roll.
- Adhésive : Type 3M on back
- Cut every :
25mm/1" (6 LED) for 12 VDC
50mm/2" (12 LED) for 24 VDC

Options :

- **IP67** silicone envelope jacket.
- Dimming available consult factory
- Choices of wiring and connecting devices.
- Custom cutting services on tape and profiles available.



Ordering Matrix / Specification

Model	Strip	Color	Lumens	Volts
NTUTS	60	WH (5000K)	1200lm/m (WH)	12 VDC
	60WP	WW (2700K)	960lm/m (WW)	24 VDC

The strip must be connected to a low voltage output power supply according to selected voltage and power criteria
WP indicates a weatherproof strip inside a flexible silicone sleeve.
Red, Green, Blue and Amber, or light colors (in °K) available on order.

Natech Industrie

3154 boulevard Industriel, Laval, QC, H7L 4P7 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, info@natechlighting.com

This specification is valid as of 2019-01 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.