

Projet :	Date :
No Cat. :	Type :
Notes :	Volts :

**Description:**

The **NTALBH-50B** LED bar design provides a unique linear lighting solution combining style, performance and durability in a profile for up & down available in 1 or 2 meters.

**Housing:**

The **NTALBH-50B** is a high precision anodized black aluminum with 2 strips NTHP120 in the bottom and 1 strip NTUT60 for the top.

**Lens:**

Precision fit extruded acrylic snap-in lens available in:

**FR** Frost

**Mounting:**

Suspension

**CS** Suspension cables (set of 2)

**Application/Installation:**

The **NTALBH-50B** LED bar can be installed for up and down light diffusion suspended with 2 suspension cables.

**Voltage:** 24 VDC

**Electrical and Electronics:**


High quality diodes tested (LM80) and certified life cycle for 60,000 hours (L80).

All certified electrical and electronic components have been re-tested over the years for compatibility within products and for specific applications. All products exceed current standards.

Dimmable power supplies are integrated in the luminaire.


**Homologation:**

Conforms to ANSI/UL standard UL-1598

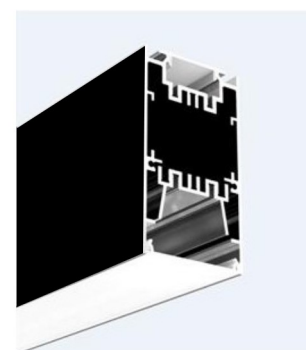

**Ordering Matrix / Specification**

Model	Lenght	Lens	Mounting	LED down	LED up	Voltage
NTALBH	50B	FR Frost	CS Suspension cable			
	1M 2M			2 X HP120-WH (5000K) 2 X HP120-NW (4100K) 2 X HP120-WW (3000K)	1 X UT60-WH (5000K) 1 X UT60-NW (4100K) 1 X UT60-WW (3000K)	4240 lumens/m 4096 lumens/m 3760 lumens/m
						0-10V dimmable 120V not dimmable

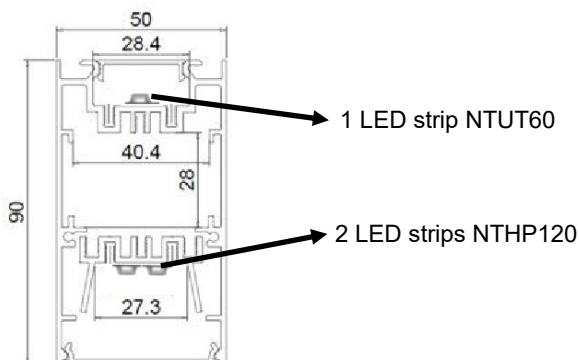

**Natech Industrie**

3154 boulevard Industriel, Laval, QC, H7L 4P7 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, info@natechlighting.com

This specification is valid as of 2019-01 and is subject to change without notice. Please confirm with the manufacturer before placing an order. Copyright 2014 Natech Industrie. All rights reserved.