

Project :	Date :
Cat. No. :	Type :
Notes :	Volts :


The NTL-301C ultra slim punctual source consisting of 3x1 watt, can be surface mounted or recessed. For cabinets, shelving and other applications.

ULTRA-SLIM 3X1W LED


CRI:	>80	
Light color:	5800K white	255lm
	3300K warm white	230lm
Fixture finish::	Aluminum alloy	
Fixture material:	Aluminum	
Optic:	3 lens 60°	
Voltage:	12VDC, wire 30cm	
Lamp life:	>50,000 hours L ₇₀	
Maximum wattage:	3.6 Watts max.	
Working temperature	-30 - +55°C	
Certification:	Conforms to ANSI/UL standard UL-2108	
	Certified to CAN/CSA standard 22.2-9.0	

Power supply class II recommended:

NTPSU12V-10W	1 to 2 pieces
NTLPV20-12	1 to 5 pieces
NTLPV60-12	1 to 12 pieces
NTPSUCLG100-12	1 to 22 pieces

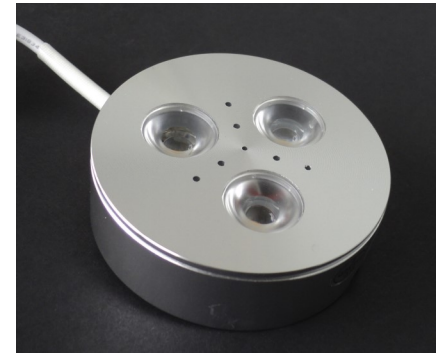

Base for surface mounted

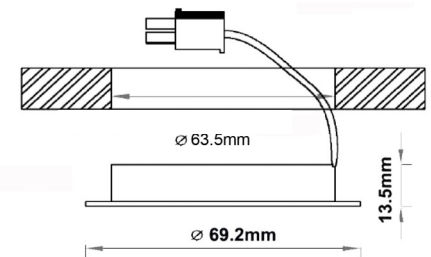

Cut-off size (recessed): Ø63.5mm

Ordering Matrix / Specification

Model	Wattage	Color
NTL-301C-RD	3W	
		58 - (5800K) 33 - (3300K)

Accessories:

NTL-CON-6B: Connector 6 plugs
 NTL-EXT-12V-1M: Extension 1 meter



Natech Industrie

3154 boulevard Industriel, Laval, QC, H7L 4P7 T: (514) 629-1169, F: (514) 629-1168, www.natechlighting.com, info@natechlighting.com

This specification is valid as of 2014-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
 Copyright 2014 Natech Industrie. All rights reserved.