

Project :

Date :

Cat no. :

Type :

Notes :

Volts :


Applications :

NTMN60 flexible linear source offers a high power ultra-thin to provide accent lighting in multiple types of installations:

- Ideal for residential or commercial
- Integrated task lighting, under cabinet lighting for studios or use it in merchandising showcases, shelving or in custom furniture projects.

The **NTMN60** must absolutely be installed on a surface that allows heat dissipation or it must be inserted in NTALB-134 or NTALB-136 aluminum profiles to allow heat transfer and thermal management.

Do not apply directly on wood, plexi-glas or other types of plastics and glass surfaces. This product must be applied on a surface where heat and temperature can create constraint

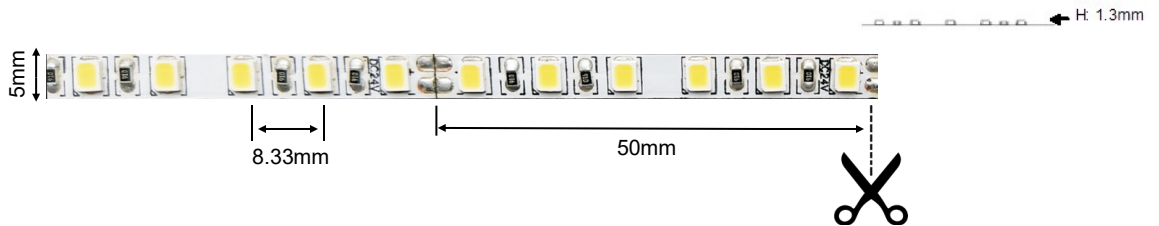

Caractéristiques :

- 120 diodes per meter
- 9.6 Watts per meter
- Voltage 24VDC standard.
- 5 meters maximum length per circuit
- 120° degrees beam
- 60,000 hours L80.
- CRI 90
- IP22 standard
- **Operating Temperatures:**
Min -40°C/+50°C Max.

Linear source dimension :


- 5 mm (0.20") wide X 1.3mm (0.05") high
- Length : 5 meters (16'4") per roll.
- Adhesive : Type 3M on back
- Cut every :
50mm/2" (6 LED) for 24 VDC

Options :

- Dimming available consult factory
- Choices of wiring and connecting devices.
- Custom cutting services on tape and profiles available.



NTALB-134



NTALB-136

Ordering Matrix / Specification

Model	Strip	Color	Lumens	Volts
NTMN	60			
		WH (5000K) NW (4100K) WW (3000K) VWW (2700K)	912 lm/m (WH) 896 lm/m (NW) 880 lm/m (WW) 870 lm/m (VWW)	24 VDC

Natech Industrie

3154 boulevard Industriel, Laval, QC, H7L 4P7 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, info@natechlighting.com

This specification is valid as of 2019-05 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.