

Project :	Date :
Cat. No. :	Type :
Notes :	Volts :



**Constant current Led driver  
Class II  
350/700MA wall plug**



### SELECTION GUIDE

NTLD350MA-WP 100-240Vac / 1-8W 350ma Constant Current LED driver  
 NTLD700MA-WP 100-240Vac / 3-9W 700ma Constant Current LED driver


### ELECTRICAL CHARACTERISTICS

Parameter	Symbol	NTLD350MA-WP	NTLD700MA-WP
Input Voltage	Vin	100V-240Vac	100V-240Vac
Input Frequency	F	50Hz/60Hz	50Hz/60Hz
Output Voltage	Vo	3-36Vdc	3-21Vdc
Output Power	Po	1-8W	3-9W
Output Current	Io	350ma ± 6%	700ma ± 6%

### ENVIRONMENTAL RATINGS

Parameter	Symbol	Minimum	Maximum
Operating temperature	Top	-10°C	+40°C
Storage temperature	Tst	-20°C	+80°C


### MECHANICAL DIMENSIONS (mm & inches)



### CONFITURATION ARRAYS WHEN USING HI POWER LEDs

*with the 350ma output current*

NTLD350MA-WP driver at 350ma/LED: from 1 to 8 LEDs in series

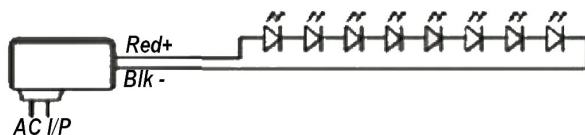

*with the 700ma output current*

NTLD700MA-WP driver at 700ma/LED: from 1 to 3 LEDs in series

