NATECH
LEDCONNX©

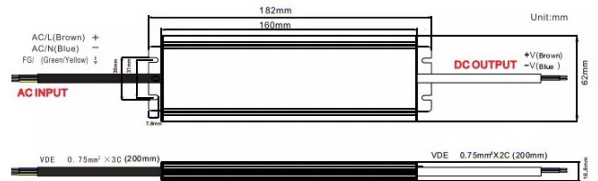| Project :		Date :	
Cat. No. :		Type :	
Notes :		Volts :	

This power supply is a constant voltage for indoor or outdoor applications, non dimmable.
100% full load burn-in test
Protection: Over load/over voltage/short circuit
Low temperature resistant (-45°C)

This driver should be installed by qualified and professional person.

ETL LISTED c US
Intertek
5010819

Specifications

Product name	AC to DC Switching 12V 24V 100w slim led driver
Output power	100W
AC input voltage rage	85-264V
output frenquency	50-60Hz
Efficiency	>85%
Output voltage	12V/24V±5%
Output current	8.3A/4.17A
Protection	Over Load, Over Voltage
Application	LED Lighting, monitor equipment
Type	Constant Voltage
Protected level	IP67
Material	Aluminium, Copper
Withstand voltage	I/P-O/P: 1.5KvAC 1 minute
	I/P-FG : 1.5KvAC 1 minute
	O/P-FG: 0.5KvAC 1 minute
Working temperature	-40℃~+80℃
Working Humidity	20%~90%RH
Size	182*62*18.6mm
Weight	0.46kg