

Project :

Date :

Cat No. :

Type :

Notes :

Volts :

Applications :

Film and TV friendly

NTUT39K linear source offers the most advanced technology of our line of flexible strips.


The **NTUT39K** enables the adjustment of the color temperature between various types of whites (2700° to 6500°K) helping create color accents in various applications.

- Create a decor or set a mood with a light luminous touch or a small light presence.
- Create a decor or set a mood with the creation of a specific ambiance.
- Integrated task lighting, under cabinet lighting for studios or use it in merchandising showcases, shelving or in custom furniture projects

The **NTUT39K** must absolutely be installed on a surface that allows heat dissipation or it must be inserted in one of our many LEDBAR aluminum profiles available to allow heat transfer and thermal management.

Do not apply directly on wood, plexiglas or other types of plastics and glass surfaces. This product must be applied on a surface where heat and temperature can create constraint.

Consult our technical specs sheets to select one of our LEDBAR architectural linear profile.

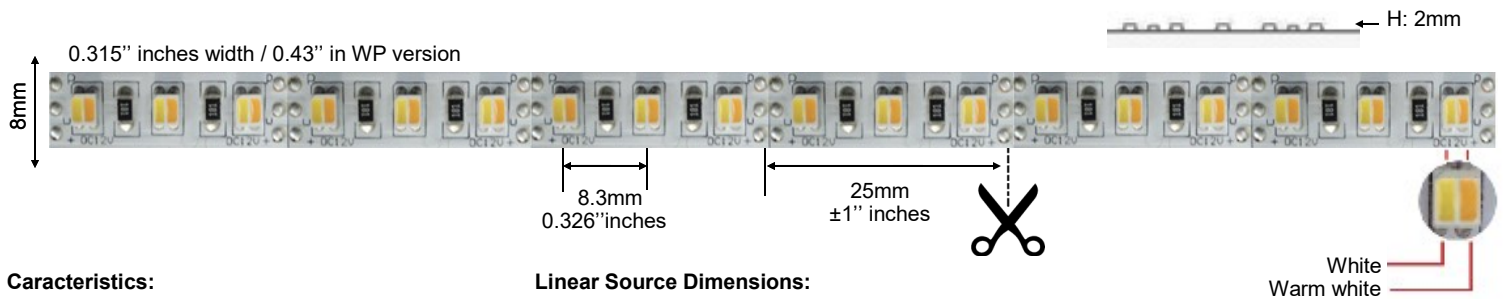

Characteristics:

- 120 bicolor diodes per meter/36 per foot
- Diode WW: 94 CRI
WH: 92 CRI
WW + WH: 92 CRI
- 19.2 Watts per meter / 5.85 Watts per foot for 2 circuits and 9.6 Watts per meter / 2.92 Watts per foot 1 circuit
- Voltage 12VDC standard
- 24 VDC on demand
- 3 meters / 117 inches maximum length per circuit
- 120° degrees beam
- Lifespan: 80,000 hours
- **IP22** standard

Linear Source Dimensions:

- 8 mm (0.31") wide X 2mm (0.08") high
- IP67 version 11mm (0.43") wide
- Length : 5 meters (16.4ft) per roll
- Adhesive: Type 3M on back
- Cut every
25mm/1" (6 LED) for 12 VDC
50mm/2" (12 LED) for 24 VDC

Options :

- **IP67** silicone envelope jacket
- Dimming available consult factory
- Choices of wiring and connecting devices
- Custom cutting services on tape and profiles available



Ordering Matrix / Specification

Model	Strip	Color	Lumens	Volts
NTUT				
	39K 39KWP	Kelvin 2700-6500K	790-830 lm/m	12 VDC 24 VDC

The strip must be connected to a low voltage output power supply according to selected voltage and power criteria
WP indicates a weatherproof strip inside a flexible silicone sleeve.

Natech Industrie

3154 boulevard Industriel, Laval, QC, H7L 4P7 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, info@natechlighting.com

This specification is valid as of 2019-01 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.