

Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

Applications :

NTRGB300 linear source consists of a high efficiency LED flexible ribbon producing saturated RGB lighting.


- Provides a programmable and variable multicolor lighting for reception halls, corridors and other venues.
- Create a decor or set a mood with the creation of a specific color and ambiance.
- Lights and easily colors surfaces such as walls, ceiling, niches, fescos, statues as well as enhances existing textures or architectural elements.

Integrated task lighting, under cabinet lighting for studios or use it in merchandising showcases, shelving or in custom furniture projects

The **NTRGB300** must absolutely be installed on a surface that allows heat dissipation or it must be inserted in one of our many LEDBAR aluminum profiles available to allow heat transfer and thermal management.

Do not apply directly on wood, plexiglas or other types of plastics and glass surfaces. This product must be applied on a surface where heat and temperature can create constraint.

Consult our technical specs sheets to select one of our LEDBAR architectural linear profile.

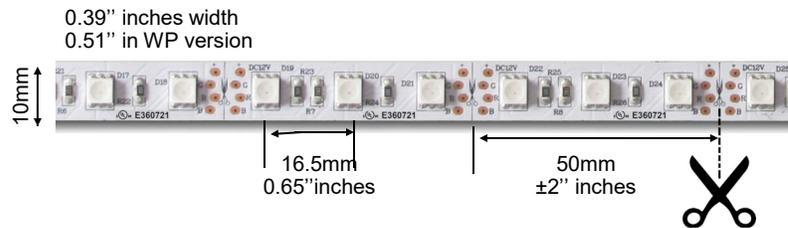

Characteristics :


- Red, green and blue modules integrated in all LED diodes.
- 60 diodes per meter / 18 per foot.
- 14.4 Watts per meter / 4.4 Watts per foot
- Voltage 12VDC standard.
- 24 VDC on demand
- 5 meters / 16'4" maximum length per circuit.
- 120° degrees beam.
- Lifespan: 80,000 hours
- **IP22** standard

Linear Source Dimension:

- 10 mm (0.39") wide X 2mm (0.08") high.
- IP67 version 13mm (0.51") wide.
- Length: 5 meters (16.4') per roll.
- Adhesive : Type 3M on back
- Cut every :
50mm / 2" (3 LED) for 12 VDC
100mm / 4" (6 LED) for 24 VDC

Options :

- **IP67** silicone envelope jacket.
- Dimming available consult factory
- Choices of wiring and connecting devices.
- Custom cutting services on tape and profiles available.



Ordering Matrix / Specification

Model	Strip	Color	Volts
NTRGB			
	300 300WP	Red, green, blue	12 VDC 24 VDC

The strip must be connected to a low voltage output power supply according to selected voltage and power criteria WP indicates a weatherproof strip inside a flexible silicone sleeve.

Natech Industrie

3154 boulevard Industriel, Laval, QC, H7L 4P7 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, info@natechlighting.com

This specification is valid as of 2015-08 and is subject to change without notice. Please confirm with the manufacturer before placing an order. Copyright 2014 Natech Industrie. All rights reserved.