

| | |
|-----------|---------|
| Project : | Date : |
| Cat No. : | Type : |
| Notes : | Volts : |

Description:

The **NTALB-114** LED bar design is distinguished by its flexibility, easy to bend and allows to fit irregular shape like around support beam or curved wall as example.

Housing:

The **NTALB-114** is a high precision extruded anodized aluminum bar that can accept a low-power LED source to medium power.

Lens:

Precision fit extruded acrylic for indoor use only available in:

PC Diffused cover

Mounting:

Mounts within on a surface with:

FC Fixed clips (set of 2)

Application/Installation:

The **NTALB-114** LED bar can be installed, for up, or down applications. They can be bend, shaped to curved surfaces for easy installation. Does not allow a 90 ° angle without breaking the metal.

Electrical and Electronics:


High quality diodes tested (LM80) and certified life cycle for 60,000 hours (L80).

All certified electrical and electronic components have been re-tested over the years for compatibility within products and for specific applications. All products exceed current standards.

Power supply not included, consult factory. Consult the LED specification sheet for the appropriate optional dimmers and controls combination for your project.

Homologation:

Conforms to ANSI/UL standard UL-2108
Certified to CAN/CSA standard 22.2-9.0




NTALB-114 - OP



Ordering Matrix / Specification

| Model | Bar | Length | Lens | Mountings | LED** | Color | Volts |
|-------|-----|------------------------------|-------------|----------------|--------------|--|----------------|
| NTALB | 114 | 1000 mm 2000 mm XX mm* | PC diffused | FC Fixed Clips | UT30 UT60 | VWW (2400K) WW (2700,3000,3500K) NW (4100K) WH (5000K) R (Red)*** B (Blue)*** G (Green)*** A (Amber)*** | 12VDC 24VDC |
| | | | | | RGB 150 | | |

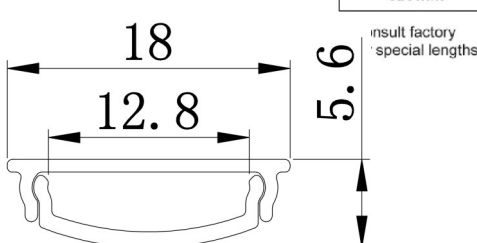

** Consult the LED linear source and driver data sheets for available wattages and characteristics.
*** Consult Factory
**** Color Correction

Natech Industrie

1995 Francis Hughes, Laval H7S 2G2 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.