

Projet :

Date :

Cat No. :

Type :

Notes :

Volts :

Description:

The **NTALB-192** LED bar design provides a unique linear robust ultra modern lighting solution combining style, performance and durability in a medium width strip, while reducing constructions and operating costs through installation time, energy savings and maintenance free application.

A lighting solution for theater, hotel entrance, shopping center.

Housing:

The **NTALB-192** is a robust high precision extruded anodized aluminum that can accept a LED linear source from normal to high power. Each assembled Led Bar included two (2) aluminum end caps screwed.

Lens:

2 Precision polycarbonate lens available in:

OP opal
FR givré

Mounting:

Mounts directly on surface on wall and it is secured

Application/Installation:

The **NTALB-192** LED bar can be installed for up and down light diffusion directly on wall. Standard length is 1 meter or 2 meters. Consult factory for special length.

Consult factory for damp application or splash area using our silicone jacketed IP67 sources. **(WP)**

Voltage:

12 VDC
24 VDC



Electrical and Electronics:

High quality diodes tested (LM80) and certified life cycle for 60,000 hours (L80). All certified electrical and electronic components have been re-tested over the years for compatibility within products and for specific applications. All products exceed current standards.

Power supply not included, consult factory. Consult the LED specification sheet for the appropriate optional dimmers and controls combination for your project.

Homologation:


Conforms to ANSI/UL standard UL-2108
Certified to CAN/CSA standard 22.2-9.0

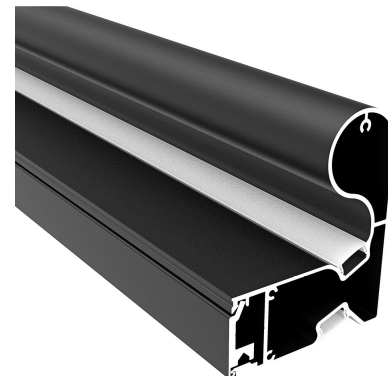

Ordering Matrix / Specification

Model	Bar	Length	Lens	Mounting	LED**	Color	Volts
NTALB	192	1000 mm	FR Frost OP Opal	base	UT30 UT30 WP UT60 UT60 WP	VWW (2400K) WW (2700, 3000, 3500K) NW (4100K) WH (5000K) R (Red)*** B (Blue)*** G (Green)*** A (Amber)***	12VDC 24VDC
		2000 mm					
* Consult factory for special lengths.							
					HP30 HP60 HP120 HP240 VHP64	VWW (2400K) WW (3000K) NW (4100K) WH (5000K) R (Red)*** B (Blue)*** G (Green)*** A (Amber)***	
					UT39K CCT (Blanc)	(2700-6500K)****	
					RGB 150		
					RGB 300		
					RGBW 192		

** Consult the LED linear source and driver data sheets for available wattages and characteristics.
*** Consult Factory
**** Color Correction

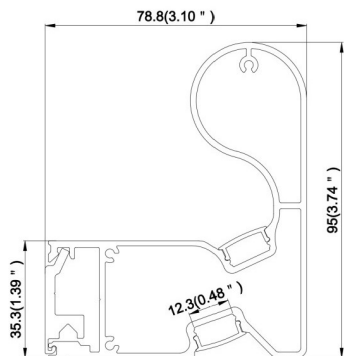

Natech Industrie

1995 Francis Hughes, Laval H7S 2G2 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.

Projet :



Date :

Cat No. :



Type :

Notes :

Volts :

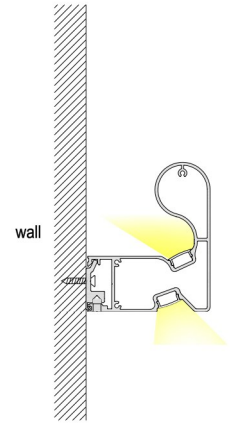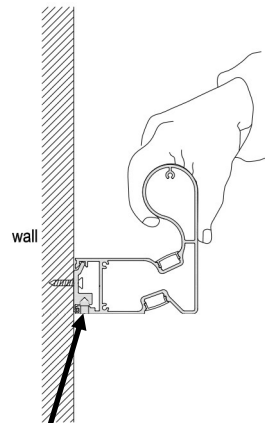

The base is screwed on the wall and the profile clicks into it and secured with a screw

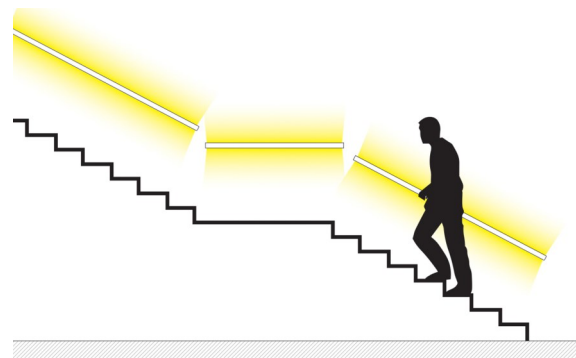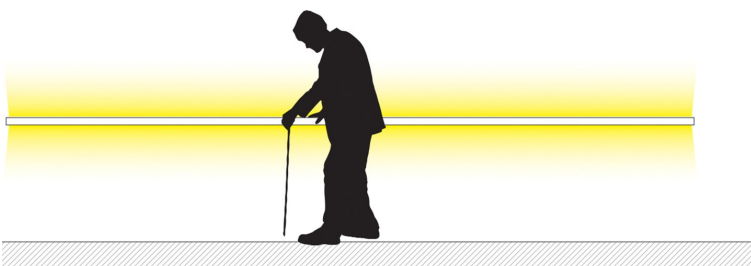

Natech Industrie

1995 Francis Hughes, Laval H7S 2G2 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.