

Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

Applications:

Ideal for areas where intelligent and RGB LED solutions are required.

- For decor, ambiance and public safety.
- Architectural accentuation with warm and cool white or ambiance creation with RGB versions.
- Motion and twilight detection for patios, pool decks, corridors and bathrooms.
- Battery back-up for emergency path of egress.
- Remote control operation available.

Suitable for indoor architectural, hospitality, commercial and residential applications.

Look for other LEDIX IP56 rated products for outdoor applications.

Housing:

Stainless steel housing polished or painted aluminium precision fit parts and assembly. Saddle mount PIR motion sensor available and semi recessed battery backup module.

Source:

0.56W	Cool white	5900K	19 lumens
0.42W	Warm white	3100K	13 lumens
0.28W	In single color source		
	RED =	630nm	
	Green =	520nm	
	Blue =	459nm	
0.84W	For RGB		

Finish:

Available in:

- Polished stainless steel finish
- Silver aluminium powder coated
- Graphite powder coated aluminium
- Old gold powder coated aluminium
- White
- Black

Options:

Choose one of the following:

1. Standard (IP44)
2. Built-in PIR motion sensor (IP20)
3. Built-in battery backup (IP20)

Mounting:

Standard Moza series can be surface mount or semi-recessed with options such as motion sensor, battery backup,

Certification :

Conforms to ANSI/UL standard UL-2108
Certified to CAN/CSA standard 22.2-9.0

Power supply requirements:


Requires a 12VDC output power supply and can also operate with a 14VDC source for automotive or RV applications.

Leads, connectors and power supply are supplied separately.

* RGB external controller needed sold separately.



01-standard



1. sticker 3M




Or

2. screw plate



01-PIR or motion sensor



Ordering Matrix / Specification

Model	Type	Installation	Voltage	Function(s)	Finish color	Color
NTWL	01		1 (12volts)			
	01= Moza	1- Surface 2- Semi-recessed		1- Standard 2- Built-in PIR motion sensor 3- Built-in battery backup	1- Aluminium 2- Stainless steel 3- Graphite 4- Old gold 5- White 6- Black	1- White 2- Warm white 3- Red 4- Green 5- Blue 6- RGB

* For led controller ask factory



Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

Applications:

Ideal for areas where intelligent and RGB LED solutions are required.

- For decor, ambiance and public safety.
- Architectural accentuation with warm and cool white or ambiance creation with RGB versions.
- Motion and twilight detection for patios, pool decks, corridors and bathrooms.
- Battery back-up for emergency path of egress.
- Remote control operation available.

Suitable for indoor architectural, hospitality, commercial and residential applications.

Look for other LEDIX IP56 rated products for outdoor applications.

Housing:

Stainless steel housing polished or painted aluminium precision fit parts and assembly. Saddle mount PIR motion sensor available and semi recessed battery backup module.

Source:

0.56W	Cool white 5900K 18 lumens
0.42W	Warm white 3100K 12 lumens
0.28W	In single color source
	RED = 630nm
	Green = 520nm
	Blue = 459nm
0.84W	For RGB

Finish:

Available in:

- Polished stainless steel finish
- Silver aluminium powder coated
- Graphite powder coated aluminium
- Old gold powder coated aluminium
- White
- Black

Options:

Choose one of the following:

1. Standard (IP44)
2. Built-in PIR motion sensor (IP20)
3. Built-in battery backup (IP20)

Mounting:

Standard Muna series can be surface mount or semi-recessed with options such as motion sensor, battery backup are chosen.

Certification :

Conforms to ANSI/UL standard UL-2108
Certified to CAN/CSA standard 22.2-9.0

Power supply requirements:


Requires a 12VDC output power supply and can also operate with a 14VDC source for automotive or RV applications.

Leads, connectors and power supply are supplied separately.

* RGB external controller needed sold separately.



02 Standard




1. sticker 3M



2. screw plate



02 PIR motion sensor



Ordering Matrix / Specification

Model	Type	Installation	Voltage	Function(s)	Finish color	Color
NTWL	02		1 (12volts)			
	02= Muna	1- Surface 2- Semi-recessed		1- Standard 2- Built-in PIR motion sensor 3- Built-in battery backup	1- Aluminium 2- Stainless steel 3- Graphite 4- Old gold 5- White 6- Black	1- White 2- Warm white 3- Red 4- Green 5- Blue 6- RGB

* For led controller ask factory



Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

Applications:

Ideal for areas where intelligent and RGB LED solutions are required.

- For decor, ambiance and public safety.
- Architectural accentuation with warm and cool white or ambiance creation with RGB versions.

Suitable for indoor architectural, hospitality, commercial and residential applications.

Look for other LEDIX IP56 rated products for outdoor applications.

Housing:

Stainless steel housing polished or painted aluminium precision fit parts and assembly.

Source:

0.56W Cool white 5900K 22 lumens
 0.42W Warm white 3100K 14 lumens
 0.28W In single color source
 RED = 630nm
 Green = 520nm
 Blue = 459nm
 0.84W For RGB

Finish:

Available in:

- Polished stainless steel finish
- Silver aluminium powder coated
- Graphite powder coated aluminium
- Old gold powder coated aluminium
- White
- Black

Options:

Choose one of the following

1. Standard (IP44)

Mounting:

Tera serie can be surface mount only.

Certification :

Conforms to ANSI/UL standard UL-2108
 Certified to CAN/CSA standard 22.2-9.0

Power supply requirements:



Requires a 12VDC output power supply and can also operate with a 14VDC source for automotive or RV applications.

Leads, connectors and power supply are supplied separately.

- * RGB external controller needed sold separately.



03 Standard



Ordering Matrix / Specification

Model	Type	Installation	Voltage	Function(s)	Finish color	Color
NTWL	03		1 (12volts)			
	03= Tera	1- Surface		1- Standard	1- Aluminium 2- Stainless steel 3- Graphite 4- Old gold 5- White 6- Black	1- White 2- Warm white 3- Red 4- Green 5- Blue 6- RGB

Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

Applications:

Ideal for areas where intelligent LED solutions are required.

- For decor, ambiance and public safety.
- Architectural accentuation with warm and cool white.

Suitable for indoor architectural, hospitality, commercial and residential applications.

Look for other LEDIX IP56 rated products for outdoor applications.

Housing:

Stainless steel housing polished or painted aluminium precision fit parts and assembly.

Source:

0.56W Cool white 5900K 10 lumens
 0.42W Warm white 3100K 7 lumens
 0.28W In single color source
 RED = 630nm
 Green = 520nm
 Blue = 459nm

Finish:

Available in:

- Polished stainless steel finish
- Silver aluminium powder coated
- Graphite powder coated aluminium
- Old gold powder coated aluminium
- White
- Black

Options:

Choose one of the following

1. Standard (IP44)

Mounting:

Standard Tico series can be surface mount only.

Certification :

Conforms to ANSI/UL standard UL-2108
 Certified to CAN/CSA standard 22.2-9.0

Power supply requirements:

Requires a 12VDC output power supply and can also operate with a 14VDC source for automotive or RV applications.


Leads, connectors and power supply are supplied separately.





04 Standard



05 Standard



05 Standard



04 Standard

Ordering Matrix / Specification

Model	Type	Installation	Voltage	Function(s)	Finish color	Color
NTWL			1 (12volts)			
	04= Tico	1- Surface		1- Standard	1- Aluminium	1- White
	05= Tico (with square plate)				2- Stainless steel	2- Warm white
					3- Graphite	3- Red
					4- Old gold	4- Green
					5- White	5- Blue
					6- Black	



Natech Industrie

1995 Francis Hughes, Laval, Qc, H7S 2G2: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
 Copyright 2014 Natech Industrie. All rights reserved.

Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

Applications:

Ideal for areas where intelligent and RGB LED solutions are required.

- For decor, ambiance and public safety.
- Architectural accentuation with warm and cool white or ambiance creation with RGB versions.
- Battery back-up for emergency path of egress.
- Remote control operation available.

Suitable for indoor architectural, hospitality, commercial and residential applications.

Look for other LEDIX IP56 rated products for outdoor applications.

Housing:

Stainless steel housing polished or painted aluminium precision fit parts and assembly. Available semi recessed battery backup module.

Source:

0.56W Cool white 5900K 20 lumens
 0.42W Warm white 3100K 14 lumens
 0.28W In single color source
 RED = 630nm
 Green = 520nm
 Blue = 459nm
 0.84W For RGB

Finish:

Available in:

- Polished stainless steel finish
- Silver aluminium powder coated
- Graphite powder coated aluminium
- Old gold powder coated aluminium
- White
- Black

Options:

Choose one of the following:

1. Standard (IP44)
3. Built-in battery backup (IP20)

Mounting:

Standard Timo series can be surface mount and only for 07 Timo with options such as battery backup, are chosen, can be recessed.

Certification :

Conforms to ANSI/UL standard UL-2108
 Certified to CAN/CSA standard 22.2-9.0

Power supply requirements:

Requires a 12VDC output power supply and can also operate with a 14VDC source for automotive or RV applications.

Leads, connectors and power supply are supplied separately.




- * RGB external controller needed sold separately.



06 Standard



07 Standard



Ordering Matrix / Specification

Model	Type	Installation	Voltage	Function(s)	Finish color	Color
NTWL			1 (12volts)			
	06= Timo	1- Surface		1- Standard	1- Aluminium	1- White
	07= Timo (with square plate)	2- Semi-recessed		2- Built-in PIR motion sensor	2- Stainless steel	2- Warm white
				3- Built-in battery backup	3- Graphite	3- Red
					4- Old gold	4- Green
					5- White	5- Blue
					6- Black	6- RGB

* For led controller ask factory



Natech Industrie

1995 Francis Hughes, Laval, Qc, H7S 2G2: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
 Copyright 2014 Natech Industrie. All rights reserved.

Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

Applications:

Ideal for areas where intelligent and RGB LED solutions are required.

- For decor, ambiance and public safety.
- Architectural accentuation with warm and cool white or ambiance creation with RGB versions.
- Motion and twilight detection for patios, pool decks, corridors and bathrooms.
- Battery back-up for emergency path of egress.
- Remote control operation available.

Suitable for indoor and outdoor architectural, hospitality, commercial and residential applications.

Look for other LEDIX IP56 rated products for outdoor applications.

Housing:

Stainless steel housing polished or painted aluminium precision fit parts and assembly. Saddle mount PIR motion sensor available and semi recessed battery backup module.

Source:

0.56W	Cool white 5900K 38 lumens
0.42W	Warm white 3100K 25 lumens
0.28W	In single color source
	RED = 630nm
	Green = 520nm
	Blue = 459nm
0.84W	For RGB

Finish:

Available in:

- Polished stainless steel finish
- Silver aluminium powder coated
- Graphite powder coated aluminium
- Old gold powder coated aluminium
- White
- Black

Options:

Choose one of the following:

1. Standard (IP56)
2. Built-in PIR motion sensor (IP20) 09 only
3. Built-in battery backup (IP20) 09 only

Mounting:

Standard Rubi series can be surface mount and only for 09 can be also recessed and semi-recessed with options such as motion sensor, battery backup, are chosen.

Certification :



Conforms to ANSI/UL standard UL-2108
Certified to CAN/CSA standard 22.2-9.0

Power supply requirements:

Requires a 12VDC output power supply and can also operate with a 14VDC source for automotive or RV applications.


Leads, connectors and power supply are supplied separately.

* RGB external controller needed sold separately.

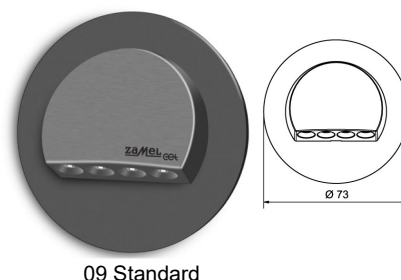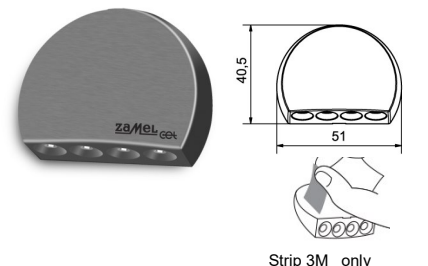


09 Standard

1. surface with 3M
2. with clip



09 PIR motion sensor



Ordering Matrix / Specification

Model	Type	Installation	Voltage	Function(s)	Finish color	Color
NTWL			1 (12volts)			
	08= Rubi	1- Surface		1- Standard	1- Aluminium	1- White
	09= Rubi (with round plate)	2- Semi-recessed		2- Built-in PIR motion sensor	2- Stainless steel	2- Warm white
				3- Built-in battery backup	3- Graphite	3- Red
					4- Old gold	4- Green
					5- White	5- Blue
					6- Black	6- RGB

* For led controller ask factory



Natech Industrie

1995 Francis Hughes, Laval, Qc, H7S 2G2: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.

Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

Applications:

Ideal for areas where intelligent and RGB LED solutions are required.

- For decor, ambiance and public safety.
- Architectural accentuation with warm and cool white or ambiance creation with RGB versions.
- Motion and twilight detection for patios, pool decks, corridors and bathrooms.
- Battery back-up for emergency path of egress.
- Remote control operation available.

Suitable for indoor and outdoor architectural, hospitality, commercial and residential applications.

Look for other LEDIX IP56 rated products for outdoor applications.

Housing:

Stainless steel housing polished or painted aluminium precision fit parts and assembly. Saddle mount PIR motion sensor available and semi recessed battery backup module.

Source:

0.56W Cool white 5900K 37 lumens
 0.42W Warm white 3100K 24 lumens
 0.28W In single color source
 RED = 630nm
 Green = 520nm
 Blue = 459nm
 0.84W For RGB

Finish:

Available in:

- Polished stainless steel finish
- Silver aluminium powder coated
- Graphite powder coated aluminium
- Old gold powder coated aluminium
- White
- Black

Options:

Choose one of the following:

1. Standard (IP56)
2. Built-in PIR motion sensor (IP20)
3. Built-in battery backup (IP20)

Mounting:

Standard Navi series can be surface mount (1) only and only 11 can be also surface or semi-recessed (2) and 11 with options such as motion sensor, battery backup, are chosen are recessed.

Certification :


Conforms to ANSI/UL standard UL-2108
 Certified to CAN/CSA standard 22.2-9.0

Power supply requirements:


Requires a 12VDC output power supply and can also operate with a 14VDC source for automotive or RV applications.

Leads, connectors and power supply are supplied separately.

* RGB external controller needed sold separately.




10 Standard




3M only




11 Standard





1. surface with 3M



2. with clip



11 PIR motion sensor



Ordering Matrix / Specification

Model	Type	Installation	Voltage	Function(s)	Finish color	Color
NTWL			1 (12volts)			
	10= Navi 11= Navi (with square plate)	1- Surface 2- Semi-recessed		1- Standard 2- Built-in PIR motion sensor 3- Built-in battery backup	1- Aluminium 2- Stainless steel 3- Graphite 4- Old gold 5- White 6- Black	1- White 2- Warm white 3- Red 4- Green 5- Blue 6- RGB

* For led controller ask factory



Natech Industrie

1995 Francis Hughes, Laval, Qc, H7S 2G2: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
 Copyright 2014 Natech Industrie. All rights reserved.

©2015-08

Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

Applications:

Ideal for areas where intelligent and RGB LED solutions are required.

- For decor, ambiance and public safety.
- Architectural accentuation with warm and cool white or ambiance creation with RGB versions..

Suitable for indoor architectural, hospitality, commercial and residential applications.

Look for other LEDIX IP56 rated products for outdoor applications.

Housing:

Stainless steel housing polished or painted aluminium precision fit parts and assembly.

Source:

0.56W	Cool white 5900K 23 lumens
0.42W	Warm white 3100K 15 lumens
0.28W	In single color source
	RED = 630nm
	Green = 520nm
	Blue = 459nm
0.84W	For RGB

Finish:

Available in:

- Polished stainless steel finish
- Silver aluminium powder coated
- Graphite powder coated aluminium
- Old gold powder coated aluminium
- White
- Black

Options:

Choose one of the following:

1. Standard (IP44)

Mounting:

Standard Sona 12 can be only surface mount and 13, 14 can be only semi recessed with clips.

Certification :

Conforms to ANSI/UL standard UL-2108
Certified to CAN/CSA standard 22.2-9.0

Power supply requirements:



Requires a 12VDC output power supply and can also operate with a 14VDC source for automotive or RV applications.

Leads, connectors and power supply are supplied separately.



- * RGB external controller needed sold separately.





12 Standard



13 Standard



2. semi recessed with clips



2. semi recessed with clips

Ordering Matrix / Specification

Model	Type	Installation	Voltage	Function(s)	Finish color	Color
NTWL			1 (12volts)			
	12= Sona	1- Surface		1- Standard	1- Aluminium	1- White
	13= Sona (with round plate)	2- Semi-recessed			2- Stainless steel	2- Warm white
	14= Sona (with square plate)				3- Graphite	3- Red
					4- Old gold	4- Green
					5- White	5- Blue
					6- Black	6- RGB



Natech Industrie

1995 Francis Hughes, Laval, Qc, H7S 2G2: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.