

Project :

Date :

Cat. No. :

Type :

Notes :

Volts :

### Applications :


**NTUTS30** flexible linear source offers a **lateral light projection** to provide accent lighting in multiple types of installations:

- Create a decor or set a mood with a light luminous touch or a small light presence.
- Integrated task lighting, under cabinet lighting for studios or use it in merchandising showcases, shelving or in custo furniture projects.

The **NTUTS30** light heat production permits applications directly on wood, plexiglass or other types of plastics and glass surfaces.

While the **NTUTS30** does not require a heat dissipation surface it can be installed in our LEDBAR product line.

**Consult our technical specs sheets to select one of our LEDBAR architectural linear profile.**

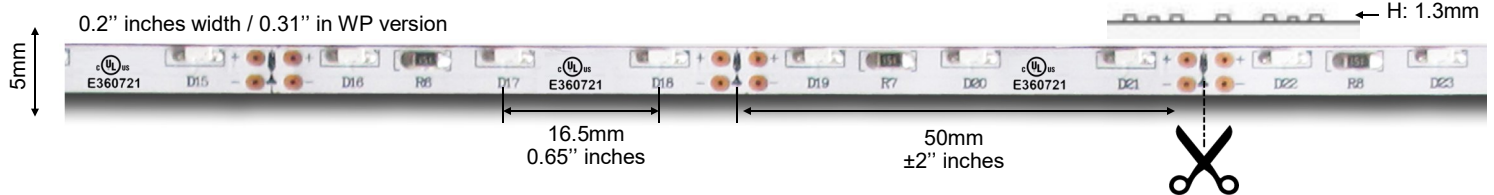

### Characteristics :

- 60 diodes per meter / 18 per foot
- 7.2 Watts per meter / 2.21 Watts per foot
- Voltage 12VDC standard.
- 24 VDC on demand
- 10 meters / 32'6" maximum length per circuit
- 120° degrees beam
- Lifespan: 80,000 hours
- **IP22** standard
- **Operating Temperatures:**  
Min -40°C/+50°C Max.

### Linear Source Dimensions :

- 5 mm (0.20") wide X 1.3mm (0.05") high
- IP67 version 8mm (0.31") wide.
- Length : 5 meters (16'4") per roll.
- Adhésive : Type 3M on back
- Cut every :  
50mm/ 2" (3 LED) for 12 VDC  
100mm/4" (6 LED) for 24 VDC

### Options :

- **IP67** silicone envelope jacket.
- Dimming available consult factory
- Choices of wiring and connecting devices.
- Custom cutting services on tape and profiles available.



### Ordering Matrix / Specification

Model	Strip	Color	Lumens	Volts
NTUTS				
	30 30WP	WH (5000K) WW (2700K)	600lm/m (WH) 480lm/m (WW)	12 VDC 24 VDC

The strip must be connected to a low voltage output power supply according to selected voltage and power criteria  
WP indicates a weatherproof strip inside a flexible silicone sleeve.  
Red, Green, Blue and Amber, or light colors (in °K) available on order.

### Natech Industrie

1995 Francis Hughes, Laval H7S 2G2 T: (450) 629-1169, F: (450) 629-1168, [www.natechlighting.com](http://www.natechlighting.com), [service@natechlighting.com](mailto:service@natechlighting.com)

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.  
Copyright 2014 Natech Industrie. All rights reserved.