


Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

NTDL-RD-3W-XX-5.5CM are ideal for landscaping, walkways, concrete and stone. Also work in outdoor and indoor downlight applications. Can be used indoors in high traffic floor or recessed in walls for shower, sauna, spa. IP67

3 WATTS LED
IP67 EXTERIOR/INTERIOR
IN GROUND/WALL/CEILING


Application:	Inground, wall, ceiling, floor	
Light colors:	White	3W 130lm
	Warm white	3W 110lm
	RGB	
Fixture finish:	Surface in gray, electrostatic powder coated	
Ring material:	Stainless steel 316	
Optic:	30° or asymmetrical	
Voltage:	24 VDC	
Lamp life:	>50,000 hours	
Maximum wattage:	3 Watts	
Fixation:	Spring clips for recessed and PVC sleeve base for landscape use	
Working temperature:	-20 - +40°C	
Certification:	Conforms ANSI/UI standard UL-2108, Certified to CAN/CSA standard C22.2 -9.0	



30°



NTDL-RD-3W-XX-5.5CM-30D



ASYMMETRICAL



NTDL-RD-3W-XX-5.5CM-ASYM

Power supply Class II recommended

NTPSU24V-10W	1 to 2 units
NTPPV-20-24	1 to 5 units
NTPPV-60-24	1 to 16 units
NTPSUCLG100-24V	1 to 24 units

* Dimming with control P.W.M. (in option) consult the factory.

Warning: When installing with holder cup in uplighting situation, proper drainage must be insured to avoid water accumulation.

Ordering Matrix / Specification

Model	Wattage	Color	Size	Degree
NTDL-RD	3W	50 5000K 30 3000K RGB	5.5cm	30 (30 degree) ASYM (asymmetric)



Natech Industrie

1995 Francis Hughes, Laval, Qc, H7S 2G2: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.

Copyright 2014 Natech Industrie. All rights reserved.

Project :


Date :

Cat. No. :

Type :


Notes :

Volts :

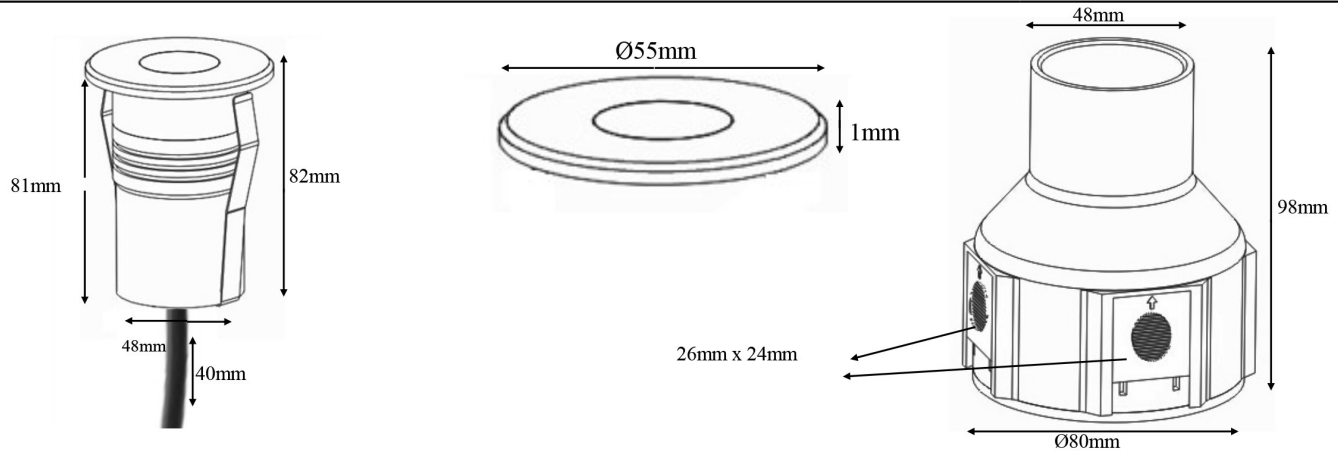


TYPICAL WIRING DIAGRAM

SINGLE COLOR

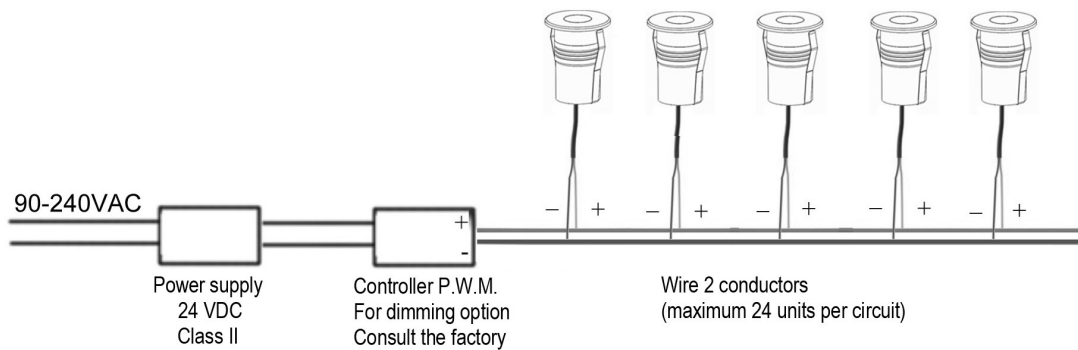

RGB

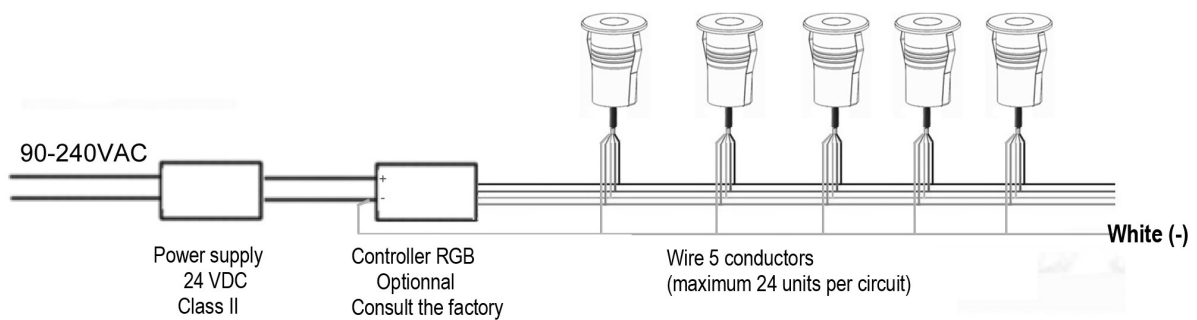

Natech Industrie

1995 Francis Hughes, Laval, Qc, H7S 2G2: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.

Copyright 2014 Natech Industrie. All rights reserved.