

Project :	Date :
Cat. No :	Type :
Notes :	Volts :



The NT-WPGR-90W are perfect replacement for traditional outdoor wall packs equivalent to 400W MH.

Housing

- Heavy duty die-cast aluminum housing, fully sealed to be dirt and bug proof
- High quality shatterproof glass refractor
- Integral secondary heat sink to optimize thermal transfer and maximize performance and life of LED
- Driver is mounted in direct contact with the casting for a low operating temperature and long life
- Polyester powder coated finish, rust and corrosion proof; stabilized to extreme climate changes without cracking or peeling.

Mounting and wiring

- Mount directly over a standard outlet box or for surface wiring via any of the 3 convenient 3/4 inch threaded conduit entry hubs



CRI:	>75
Light color:	5000K
Fixture finish:	Surface in bronze, electrostatic powder coated
Fixture material:	Aluminium & shatter proof glass
Optic:	160°
Voltage:	120-277Vac *
Lamp life:	>50,000 hours
Maximum wattage:	90W 75lm per watt
Working temperature	-34 - +54°C
IP:	IP65 Suitable for damp/wet location
Homologation:	 

* 347Vac available on request

Ordering Matrix / Specification

Model	Wattage	Voltage	Color
NT-WPGR	90 Watts	120-277Vac	50K (5000K)

* for other voltage contact factory

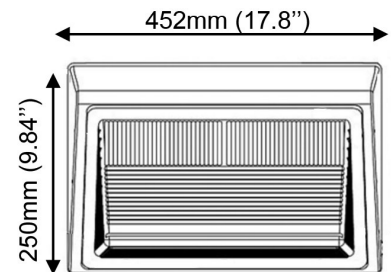

Natech Industrie

1995 Francis Hughes, Laval, QC, H7S 2G2 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-10 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.