

Project :	Date :
Cat. No. :	Type :
Notes :	Volts :




The NTCL-RC-10W shell is made of high quality aluminum die casting with excellent heat dissipation. Face covered with tempered glass and silicone rubber waterproof ensuring superior waterproof lamps performance.

Can be used for facade lighting, building facade, doors pavillon, gazebo, columns, interior or exterior walls for creating a light environment for windows

Projection of distance: 1 to 3 meters

<b>CRI:</b>	>80
<b>Light color:</b>	4000K natural white 700lm 2700K warm white 600lm RGB controller needed RGBW controller needed
<b>Fixture finish:</b>	Surface in dark gray, surface anodic oxidation treatment
<b>Fixture material:</b>	Aluminium
<b>Diffuser:</b>	Tempered glass T:3mm
<b>Optic:</b>	3*170°
<b>Voltage:</b>	24VDC or ac90-260v
<b>Lamp life:</b>	>50,000 hours CREE
<b>Maximum wattage:</b>	1 x 10 watts
<b>Fixation:</b>	fix the fixture with screws
<b>Protection level:</b>	IP65
<b>Working temperature:</b>	-30 - +55°C
<b>Certification:</b>	Conforms ANSI/UL standard UL-2108, Certified CAN/CSA standard 22.2-9.0
<b>Power supply Class II recommended</b>	

\* For dimming or control option, please consult the factory

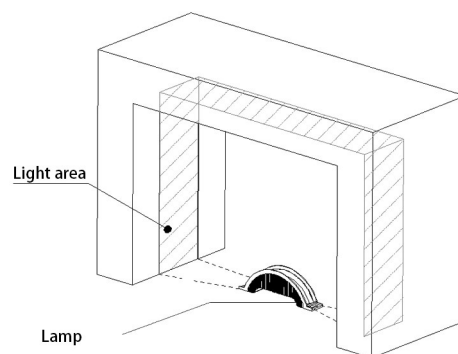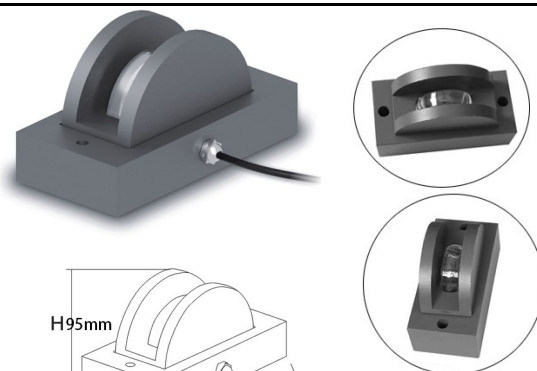

3\*170°

### Ordering Matrix / Specification

Model	Wattage	Color	Dimension
NTCL-RC	10W	40 (4000K) 27 (2700K) RGB RGBW	15CM*60CM



#### Natech Industrie

1995 Francis Hughes, Laval, QC, H7S 2G2 T: (450) 629-1169, F: (450) 629-1168, [www.natechlighting.com](http://www.natechlighting.com), [service@natechlighting.com](mailto:service@natechlighting.com)

This specification is valid as of 2022-10 and is subject to change without notice. Please confirm with the manufacturer before placing an order.  
Copyright 2014 Natech Industrie. All rights reserved.