



Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

- Universal input, 110-277Vac
- Build in active PFC, typical power factor>0.95, THD<20%@120V Max. load
- High efficiency : up to 80%
- Load: 0.1-100%
- Short-circuit, over-temperature, over-load protection
- Full protection metal case, for dry, damp, wet location
- Flicker-free
- Suitable for LED lighting and moving sign applications
- Dim-all: Triac/0-10V/1-10V/10V PWM/Potentiometer
- Switch to PWM or Voltage Reduce output

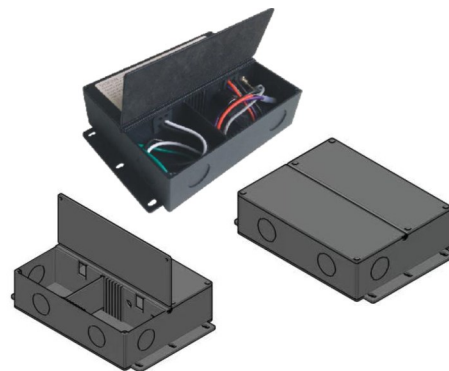


Model		NT-OTM-TD96-JA24
Output	DC Voltage	24V
	Rated Current	4A
	Rated Power	96W
	Voltage Tolerance	±0.5V
	Voltage Regulation	±0.5%
	Load Regulation	±1%
Input	Voltage Range	110-277VAC
	Frequency Range	47-63Hz
	Power Factor (Typ.) @ full load	0.98@120VAC 0.97@277VAC
	THD (Typ.) @ full load	<20% @120VAC &277VAC
	Efficiency (Typ.) @ full load	12V/24V 86% @120Vac 88%@277Vac
	AC Current (Max.)	1.3A@110Vac
	Inrush Current (Typ.)	20A, 50%, 1.6ms @120VAC;
	Leakage current	<0.50mA
Protection	Short Circuit	shut down o/p voltage, re-power on to recover after fault condition is removed
	Over Loading	≤120% Hiccup mode,recovers automatically after fault condition is removed
	Over temperature	100℃±10℃ shut down o/p voltage, automatically recover after cooling.
Environment	Working TEMP.	-40~+60℃ (see below derating curve)
	Working Humidity	20~90%RH, non-condensing
	Storage TEMP. Humidity	-40~+80℃, 10~95%RH
	TEMP .coefficient	±0.03%/℃ (0~50℃)
	Vibration	10~500Hz, 5G 10min./1 cycle,period for 60min. each along X,Y,Z axes
Safety& EMC	Safety standards	UL8750+UL1310
	Withstand voltage	I/P-O/P:1.88KVAC
	Isolation resistance	I/P-O/P:100MΩ/500VDC/25℃/70%RH
	EMC EMISSION	FCC Part 15 B
others	Net. Weight	1.1Kg
	Size	226.5*117.5*42.5mm (L*W*H)

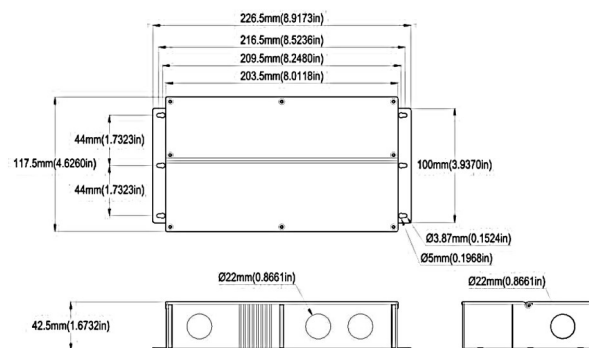

Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

MLV OR TRIAC ELV WIRING DIAGRAM AND FOR PWM SWITCH ON

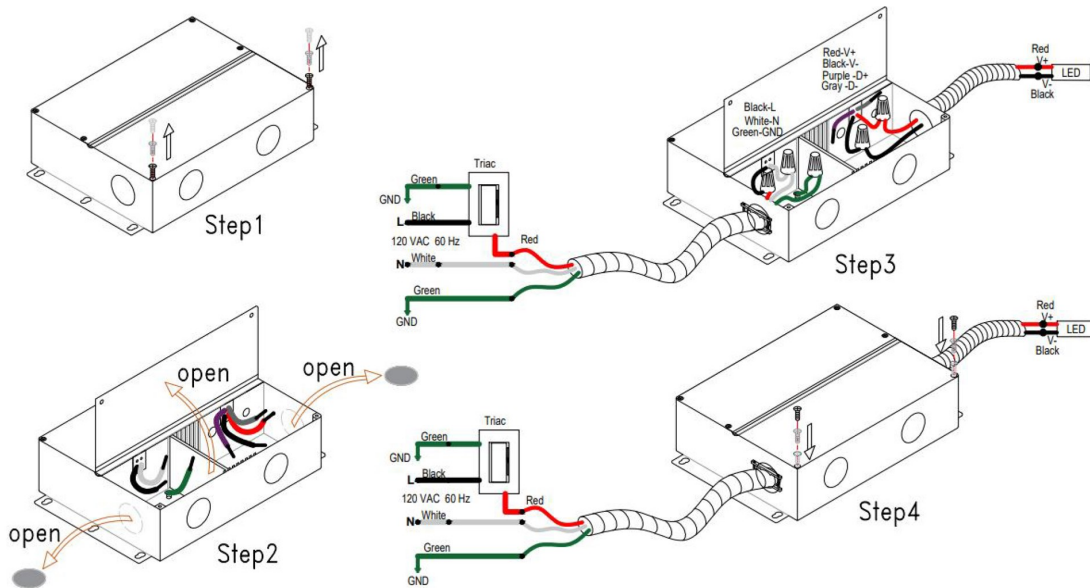

0-10V WIRING DIAGRAM AND FOR PWM SWITCH ON

