

Project :

Date :

Cat no. :

Type :

Notes :

Volts :

Description:

The **NTALB-218** LED bar design to illuminate artwork or photographs. We recommend the cob led 10mm or less as a light source to light without dots. Only one type of diffuser is available: the Asymmetric Lens, which has a non-uniform shape and is designed with varying curvatures on each side, allowing it to focus lighting more effectively. The wall rods are included, allowing for easy wall mounting above the pictures.

Lens:

Only one lens are available that can illuminate walls evenly

ASY asymmetric

Mounting:

Mounts within on a surface with:

2 wall lamp bracket (262mm/10.315")

Application/Installation:

The **NTALB-218** LED is for art galleries, museum, retail display, etc..

Voltage:

12 VDC
24 VDC

Electrical and Electronics:

High quality diodes tested (LM80) and certified life cycle for 60,000 hours (L80).

All certified electrical and electronic components have been re-tested over the years for compatibility within products and for specific applications. All products exceed current standards.

Power supply not included, consult factory. Consult the LED specification sheet for the appropriate optional dimmers and controls combination for your project.

Homologation:

Conforms to ANSI/UL standard UL-2108


Certified to CAN/CSA standard 22.2-9.0




NTALB-218



NTALB-218-BK



Asymmetric Lens

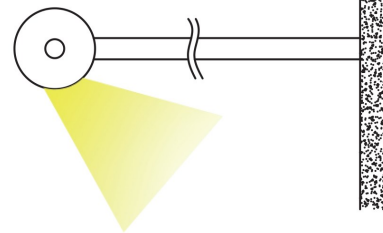

Ordering Matrix / Specification

Model	Bar	Length	Lens	Mounting	LED**	Color	Volts
NTALB			ASY	ARM (262MM / 10.315")			
	NTALB-218 (aluminium) NTALB-218 BK (noir)	1000 mm 2000 mm XX mm*			UT30 (4.6W/M 450LM) UT50 (10W/M 890LM)	VWW (2400K) WW (2700,3000,3500K) NW (4100K) WH (5000K) R (Red)*** B (Blue)*** G (Green)*** A (Amber)***	12VDC 24VDC
		* Consult factory for special lengths.			HP60 (10W/M 1070LM)	WW (3000K) NW (4100K) WH (5000K) 24V ONLY	12VDC 24VDC
					HP7.2 (7.2W/M 1008LM) HP10 (10W/M 1450LM) HP120 (19.2W/M 1600LM) VHP64 (22W/M 3437LM)	WW (3000K) NW (4100K) WH (5000K)	24VDC
					UT39K (20W/M 790-830LM) CCT White	(2700-6500K)***	
					RGBW192 (15.3V/M 343LM)		

* Consult factory for special K

** Consult the LED linear source and driver data sheets for available wattages and characteristics

*** Consult factory

****Color correction

Project :	Date :
Cat no. :	Type :
Notes :	Volts :

