

NTWL-02-XXX-XX

Project :	Date :
Cat. No. :	Type:
Notes:	Volts:

Applications:

Ideal for areas where intelligent and RGB LED solutions are required.

- · For decor, ambiance and public safety.
- Architectural accentuation with warm natural and cool white or ambiance creation with RGB versions.
- Motion and twilight detection for patios, pool decks, corridors and bathrooms.
- Remote control operation available.

Suitable for indoor architectural, hospitality, commercial and residential applications.

Look for other LEDIX IP56 rated products for outdoor applications.

Housing:

Stainless steel housing polished or painted aluminium precision fit parts and assembly. Saddle mount PIR motion sensor available and semi recessed battery backup module.

Source:

0.56W Cool white 5900K 32 lumens 0.42W Warm white 3100K 29lumens 0.40W Natural white 4200K 45 lumens

0.84W For RGB

Finish:

Available in:

- · Polished stainless steel finish
- Silver aluminium powder coated
- Graphite powder coated aluminium
- · Old gold powder coated aluminium
- White
- Black

Options:

Choose one of the following:

- 1. Standard (IP44)
- 6. Built-in PIR motion sensor (IP20)

Mounting:

Standard Muna series can be surface mount or semi-recessed with options such as motion sensor, are chosen.

Certification:

Conforms to ANSI/UL standard UL-2108 Certified to CAN/CSA standard 22.2-9.0

Power supply requirements:


Requires a 12VDC output power supply and can also operate with a 14VDC source for automotive or RV applications.

Leads, connectors and power supply are supplied separately.


* RGB external controller needed sold separately.




02 Standard










Ordering Matrix / Specification

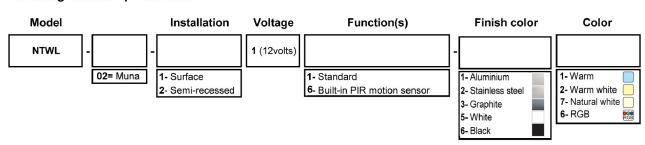



Natech Industrie

1995 Francis Hughes, Laval, Qc, H7S 2G2: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com