

NTWL-06/07-XX-XXX

Project :	Date :
Cat. No. :	Type:
Notes:	Volts:

Applications:

Ideal for areas where intelligent and RGB LED solutions are required.

- For decor, ambiance and public safety.
- Architectural accentuation with warm, natural white and cool white or ambiance creation with RGB versions.
- Remote control operation available.

Suitable for indoor architectural, hospitality, commercial and residential applications.

Look for other LEDIX IP56 rated products for outdoor applications.

Housing:

Standard

0.56W Cool white 5900K 36 lumens 0.42W Warm white 3100K 33 lumens 0.40W Natural white 4200K 43 lumens 0.84W For RGB

Finish:

Available in:

- · Polished stainless steel finish
- Silver aluminium powder coated
- · Graphite powder coated aluminium
- · Old gold powder coated aluminium
- White
- Black

Options:

Choose one of the following:

1. Standard (IP44)

Mounting:

Standard Timo series can be surface mount and only for 07 Timo with optionare chosen, can be recessed.

Certification:

Conforms to ANSI/UL standard UL-2108 Certified to CAN/CSA standard 22.2-9.0

Power supply requirements:

Requires a 12VDC output power supply and can also operate with a 14VDC source for automotive or RV applications.

Leads, connectors and power supply are supplied separately.


RGB external controller needed sold separately.




06 Standard



07 Standard



Ordering Matrix / Specification

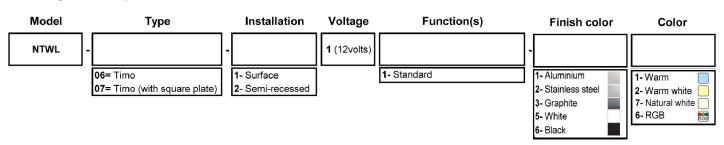

Natech Industrie

1995 Francis Hughes, Laval, Qc, H7S 2G2: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

Intertek 4010322