

Project :

Date :

Cat.No. :

Type :

Notes :

Volts :

Applications :


NTUT60 linear source consists of a high efficiency LED flexible ribbon producing an intense and reliable light source. (Comparable to a T8)

- Create a decor or set a mood with the creation of a specific ambiance.
- Intergrated task lighting, under cabinet lighting scenery for studios or use it in merchandising, shelving or in custom furniture projects.

The **NTUT60** must absolutely be installed on a surface that allows heat dissipation or it must be inserted in one of our many LEDBAR aluminum profiles available to allow heat transfer and thermal management.

Do not apply directly on wood, plexiglas or other types of plastics and glass surfaces. This product must be applied on a surface where heat and temperature can create constraint.

Consult our technical specs sheets to select one of our LEDBAR architectural linear profile.

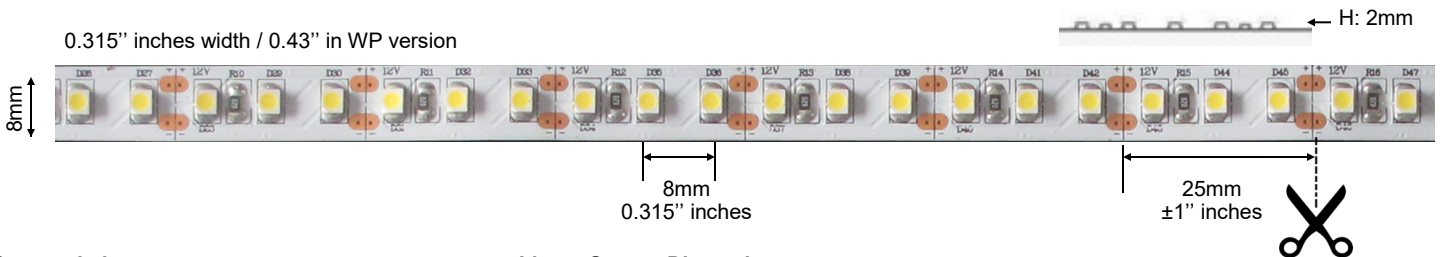

Characteristics :

- 120 diodes per meter/36 per foot
- 10 Watts per meter/ 3 Watts per foot
- Voltage 12VDC standard.
- 24 VDC on demand
- 5 meters / 16'4" maximum length per circuit
- 120° degrees beam
- Lifespan: 80,000 hours
- **IP22** standard
- **Operating Temperatures:**
Min -40°C/+50°C Max.

Linear Source Dimensions:

- 8 mm (0.31") wide X 2mm (0.08") high
- IP67 version 11mm (0.43") wide.
- Length : 5 meters (16'4") per roll.
- Adhesive : Type 3M on back
- Cut every :
25mm/1" (3 LED) for 12 VDC
50mm/2" (6 LED) for 24 VDC

Options :

- **IP67** silicone envelope jacket.
- Dimming available consult factory
- Choices of wiring and connecting devices.
- Custom cutting services on tape and profiles available.



Ordering Matrix / Specification

| Model | Strip | Color | Lumens | Volts |
|-------|-------|----------------------|----------------|--------|
| NTUT | 60 | WH (5000K) | 880 lm/m (WH) | 12 VDC |
| | 60WP | NW (4100K) | 896 lm/m (NW) | |
| | | VW (2700,3000,3500K) | 864 lm/m (VW) | |
| | | VWW (2400K) | 870 lm/m (VWW) | 24 VDC |

The strip must be connected to a low voltage output power supply according to selected voltage and power criteria WP indicates a weatherproof strip inside a flexible silicone sleeve. Red, Green, Blue and Amber, or light colors (in °K) available on order.

Natech Industrie

1995 Francis Hughes, Laval, QC, H7S 2G2 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

Cette spécification est valide en date du 2022-10 et est sujette à changement sans préavis. Veuillez confirmer avec le fabricant avant de placer une commande. Droit de reproduction ©2014 Natech Industrie. Tous droits réservés.