

Project :	Date :
Cat. No :	Type :
Notes :	Volts :

Description:

The **NTALB-34** LED bar design provides a unique linear lighting solution combining style, performance and durability while reducing constructions and operating costs through installation time, energy savings and maintenance free application.

Housing:

The **NTALB-34** is a high precision extruded anodized aluminum that can accept a LED linear source from normal to medium power.

Lens:

Precision fit extruded 3mm waterproof polyethylene snap-in flat lens, shock resistant for pedestrian traffic available in:

FR Frosted

Mounting:

Mounts directly on the surface or within a recessed section

DA Dimple clip "A"

Voltage:

12 VDC

24 VDC

Electrical and Electronics:

High quality diodes tested (LM80) and certified life cycle for 60,000 hours (L80)


All certified electrical and electronic components have been re-tested over the years for compatibility within products and for specific applications. All products exceed current standards.

Power supply not included, consult factory. Consult the LED specification sheet for the appropriate optional dimmers and controls combination for your project.


Homologation:

Conforms to ANSI/UL standard UL-2108

Certified to CAN/CSA standard 22.2-9.0

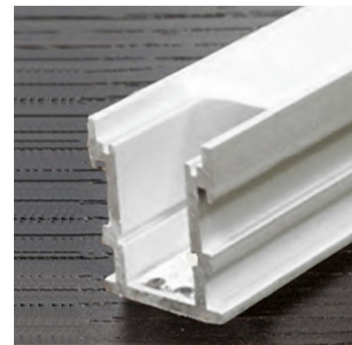

NTALB34 - FR

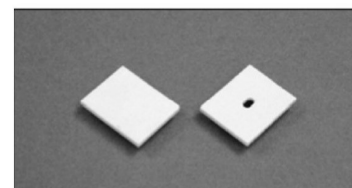


NTALB34 - End Caps

Application/Installation:

The **NTALB-34** LED bar can be installed inside or outside.


Consult factory for damp application or splash area using our silicone jacketed IP67 sources. **(WP)**

IMPORTANT the diffuser requires a little glue to have a better hold



DA Dimple clip "A"
spring load action

Ordering Matrix / Specification

Model	Bar	Length	Lens	Mounting	LED**	Color	Volts															
NTALB	34	1000 mm 2000 mm XX mm*	FR Frosted	DA Dimple clip "A"	UT30 UT30 WP UT60 UT60 WP	VWW (2400K) WW (2700, 3000, 3500K) NW (4100K) WH (5000K) R (Red)*** B (Blue)*** G (Green)*** A (Amber)***	12VDC 24VDC															
		* Consult factory for special lengths.																				
																						
		<table><tr><td>HP30 (14.5W/M 1279LM) HP60 (10W/M 1079LM)</td><td>WW (3000K) NW (4100K) WH (5000K)</td><td></td></tr><tr><td>HP7.2 (7.2W/M 1008LM) HP10 (10W/M 1453LM) HP120 (19.2W/M 1600LM) VHP64 (22W/M 3437LM)</td><td>WW (3000K) NW (4100K) WH (5000K)</td><td>24VDC</td></tr><tr><td>CCT HP304 (14W/M 560-700LM) UT39K (20W/M 750-830LM)</td><td>(2700-6500K)****</td><td></td></tr><tr><td>RGB 150 (7.2W/M) RGB 300 (14.4W/M) RGB 840 (14.4W/M)</td><td colspan="2">** Consult the LED linear source and driver data sheets for available wattages and characteristics *** Consult Factory **** Color Correction</td></tr><tr><td>RGBW192 (15.3W/M 343LM)</td><td colspan="2"></td></tr></table>						HP30 (14.5W/M 1279LM) HP60 (10W/M 1079LM)	WW (3000K) NW (4100K) WH (5000K)		HP7.2 (7.2W/M 1008LM) HP10 (10W/M 1453LM) HP120 (19.2W/M 1600LM) VHP64 (22W/M 3437LM)	WW (3000K) NW (4100K) WH (5000K)	24VDC	CCT HP304 (14W/M 560-700LM) UT39K (20W/M 750-830LM)	(2700-6500K)****		RGB 150 (7.2W/M) RGB 300 (14.4W/M) RGB 840 (14.4W/M)	** Consult the LED linear source and driver data sheets for available wattages and characteristics *** Consult Factory **** Color Correction		RGBW192 (15.3W/M 343LM)		
HP30 (14.5W/M 1279LM) HP60 (10W/M 1079LM)	WW (3000K) NW (4100K) WH (5000K)																					
HP7.2 (7.2W/M 1008LM) HP10 (10W/M 1453LM) HP120 (19.2W/M 1600LM) VHP64 (22W/M 3437LM)	WW (3000K) NW (4100K) WH (5000K)	24VDC																				
CCT HP304 (14W/M 560-700LM) UT39K (20W/M 750-830LM)	(2700-6500K)****																					
RGB 150 (7.2W/M) RGB 300 (14.4W/M) RGB 840 (14.4W/M)	** Consult the LED linear source and driver data sheets for available wattages and characteristics *** Consult Factory **** Color Correction																					
RGBW192 (15.3W/M 343LM)																						