

Project :	Date :
Cat. No :	Type :
Notes :	Volts :

Description:

The **NTALB-062** LED bar design provides a unique linear lighting solution combining style, performance and durability while reducing construction and operating costs through installation time, energy savings and a maintenance free application.

Housing:

The **NTALB-062** is a high precision extruded anodized aluminum that can accept a LED linear source from normal to medium power. Each assembled Led Bar included two (2) aluminum end caps screwed.

Lens:

Precision fit extruded acrylic snap-in available in

PC Diffused PC
BK Black PC

Mounting:

Mounts directly on the surface with
B Aluminum bracket

Application/Installation:

The **NTALB-062** LED bar can be installed, for up or down applications.
Consult factory for damp application or splash area using our silicone jacketed IP67 sources. (**WP**)

Voltage:

12 VDC
24 VDC

Electrical and Electronics:


High quality diodes tested (LM80) and certified life cycle for 50,000 hours (L70).

All certified electrical and electronic components have been re-tested over the years for compatibility within products and for specific applications. All products exceed current standards.

Power supply not included, consult factory. Consult the LED specification sheet for the appropriate optional dimmers and controls combination for your project.

Homologation:


Conforms to ANSI/UL standard UL-2108
Certified to CAN/CSA standard 22.2-9.0



NTALB-62



NTALB-62BK




Endcaps with screw

Ordering Matrix / Specification

Model	Bar	Length	Lens	Mounting	LED**	Color	Volts
NTALB							
	62 (aluminium) 62 BK (black)	1000 mm 2000 mm XX mm*	PC Polycarbonate BK Black PC	B Base	UT30 UT30 WP UT60 UT60 WP	VWW (2400K) WW (2700K) NW (4100K) WH (5000K) R (Red)*** B (Blue)*** G (Green)*** A (Amber)***	12VDC 24VDC
					HP30 (14.5W/M 1279LM) HP60 (10W/M 1070LM)	WW (3000K) NW (4100K) WH (5000K)	12VDC 24VDC
					HP7.2 (7.2W/M 1098LM) HP10 (10W/M 1450LM) HP120 (19.2W/M 1600LM) VHP64 (22W/M 3437LM)	WW (3000K) NW (4100K) WH (5000K)	24VDC
					CCT (Blanc) HP304 (14W/M 560-700LM) UT39K (20W/M 750-830LM)	(2700-6500K)****	
					RGB 150 (7.2W/M) RGB 300 (14.4W/M) RGB 840 (14.4W/M)		
					RGBW192 (15.3W/M 343LM)		

* Consult factory for special lengths.

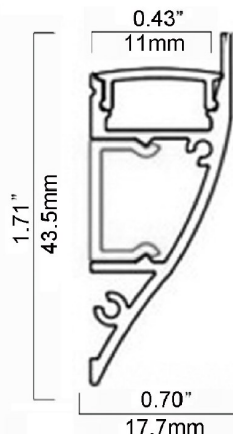


** Consult the LED linear source and driver data sheets for available wattages and characteristics.
*** Consult Factory
**** Color Correction

Natech Industrie

1995 Francis Hughes, Laval H7S 2G2 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.

Project :	Date :
Cat. No :	Type :
Notes :	Volts :

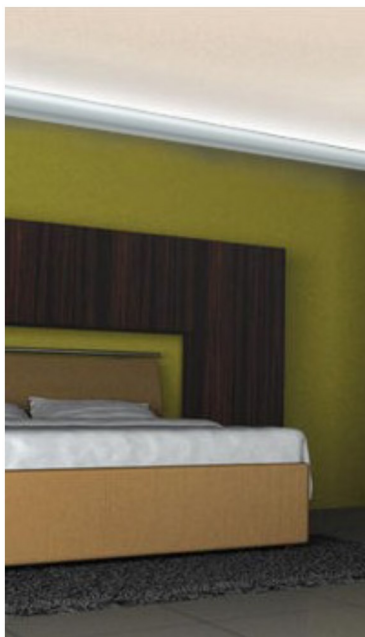

NTALB-62



Endcaps with screw

