

Project :	Date :
Cat. No :	Type :
Notes :	Volts :

Description:

The **NTALB-56** or **NTALBH-56** LED bar design provides a unique linear lighting solution combining style, performance and durability in a medium width strip, while reducing constructions and operating costs through installation time, energy savings and maintenance free application.

Housing:

The **NTALB-56** is a high precision extruded anodized aluminum that can accept a LED linear source from normal to high power. Each assembled Led Bar included two (2) aluminum end caps screwed.

Lens:

Precision fit extruded acrylic snap-in diffusing up or down and available in:

OP Opal (white)

Mounting:

Mounts suspended

CS Suspension cables
2 meters length (set of 2)

Application/Installation:

The **NTALB-56** LED bar can be suspended with 2 suspension cables.
Consult factory for damp application or splash area using our silicone jacketed IP67 sources. (**WP**)

Voltage:

12 VDC
24 VDC

Electrical and Electronics:

High quality diodes tested (LM80) and certified life cycle for 60,000 hours (L80).

All certified electrical and electronic components have been re-tested over the years for compatibility within products and for specific applications. All products exceed current standards.

Power supply not included, consult factory. Consult the LED specification sheet for the appropriate optional dimmers and controls combination for your project.

Homologation:

MODEL NTALB


Conforms to ANSI/UL standard UL-2108
Certified to CAN/CSA standard 22.2-9.0

MODEL NTALBH

Conforms to ANSI/UL standard UL-1598
Certified to CAN/CSA standard 22.2-250.0



NTALB-56



ENDCAPS



SUSPENSION CABLES


Ordering Matrix / Specification

Model	Bar	Length	Lens	Mounting	LED**	Color	Volts
NTALB*	56						
NTALBH**		1000 mm 2000 mm XX mm*	OP Opal	CS Suspension Cable *	UT30 UT30 WP UT60 UT60 WP UT120 UT120 WP UT120 RGB+WH	VWW (2400K) WW (2700, 3000, 3500K) NW (4100K) WH (5000K) R (Red)*** B (Blue)*** G (Green)*** A (Amber)***	12VDC 24VDC

* External power supply
** Internal power supply

* Consult factory for special lengths.

2 meters wire standard



*Remote driver available

HP30 (14.5W/M 1279LM)
HP30WP
HP60 (10W/M 1070LM)

HP7.2 (7.2W/M 1098LM)
HP10 (10W/M 1450LM)
HP120 (19.2W/M 1600LM)
HP120WP
VHP64 (32W/M 3437LM)
VHP64WP

CCT (Blanc)
HP304 (4.4W/M 560-700LM)
UT39K (20W/M 760-830LM)
UT39K WP

RGB 150 (7.2W/M)
RGB 150 WP

RGB 300 (14.4W/M)
RGB 300 WP
RGB 840 (14.4W/M)

RGBW192 (15.3W/M 343LM)
RGBW192 WP
RGBW 896 16W/M 320LM)

WW (3000K)
NW (4100K)
WH (5000K)

WW (3000K)
NW (4100K)
WH (5000K)

(2700-6500K)****

** Consult the LED linear source and driver data sheets for available wattages and characteristics.

*** Consult Factory



**** Color Correction

Natech Industrie

1995 Francis Hughes, Laval H7S 2G2 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.

Project :	Date :
Cat. No :	Type :
Notes :	Volts :

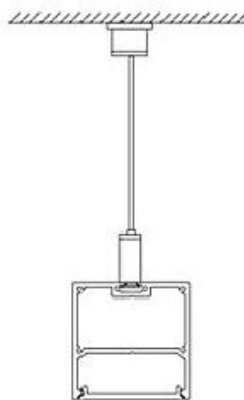

NTALB-55



NTALB-56



SUSPENSION
CABLES



Natech Industrie

1995 Francis Hughes, Laval H7S 2G2 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.