NT-OTM-VPA96-J12/24V-F


Triac ELV/MLV/0-10V/PWM 5 EN 1

Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

- Universal input, 110-277Vac
- Build in active PFC, typical power factor>0.95, THD<20%@120V Max. load
- High efficiency : up to 80%
- Load: 0.1-100%
- Short-circuit, over-temperature, over-load protection
- Full protection metal case, for dry, damp, wet location
- Flicker-free
- Suitable for LED lighting and moving sign applications
- Dim-all: Triac/0-10V/1-10V/10V PWM/Potentiometer
- Switch to PWM or Voltage Reduce output

c UL us
E525847



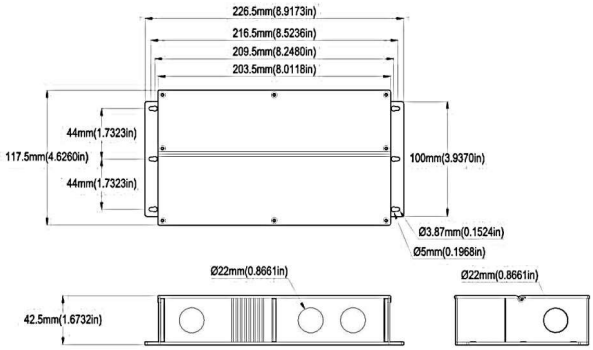

Model		NT-OTM-TD96-JA24
Output	DC Voltage	24V
	Rated Current	4A
	Rated Power	96W
	Voltage Tolerance	±0.5V
	Voltage Regulation	±0.5%
	Load Regulation	±1%
Input	Voltage Range	110-277VAC
	Frequency Range	47-63Hz
	Power Factor（Typ.）@ full load	0.98@120VAC 0.97@277VAC
	THD（Typ.）@ full load	<20% @120VAC &277VAC
	Efficiency（Typ.）@ full load	12V/24V 86% @120Vac 88%@277Vac
	AC Current（Max.）	1.3A@110Vac
	Inrush Current （Typ.）	20A, 50%, 1.6ms @120VAC;
	Leakage current	<0.50mA
Protection	Short Circuit	shut down o/p voltage, re-power on to recover after fault condition is removed
	Over Loading	≤120% Hiccup mode,recovers automatically after fault condition is removed
	Over temperature	100℃±10℃ shut down o/p voltage, automatically recover after cooling.
Environment	Working TEMP.	-40～+60℃ (see below derating curve)
	Working Humidity	20～90%RH, non-condensing
	Storage TEMP. Humidity	-40～+80℃，10～95%RH
	TEMP .coefficient	±0.03%/℃（0～50℃）
	Vibration	10～500Hz, 5G 10min./1 cycle,period for 60min. each along X,Y,Z axes
Safety& EMC	Safety standards	UL8750+UL1310
	Withstand voltage	I/P-O/P:1.88KVAC
	Isolation resistance	I/P-O/P:100MΩ/500VDC/25℃/70%RH
	EMC EMISSION	FCC Part 15 B
others	Net. Weight	1.1Kg
	Size	226.5*117.5*42.5mm (L*W*H)

Natech Industrie
1995 Francis Hughes, Laval, QC, H7S 2G2 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-10 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.


NT-OTM-VPA96-J12/24V-F

Triac ELV/MLV/0-10V/PWM


5 EN 1

Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

MLV OR TRIAC ELV WIRING DIAGRAM AND FOR PWM SWITCH ON

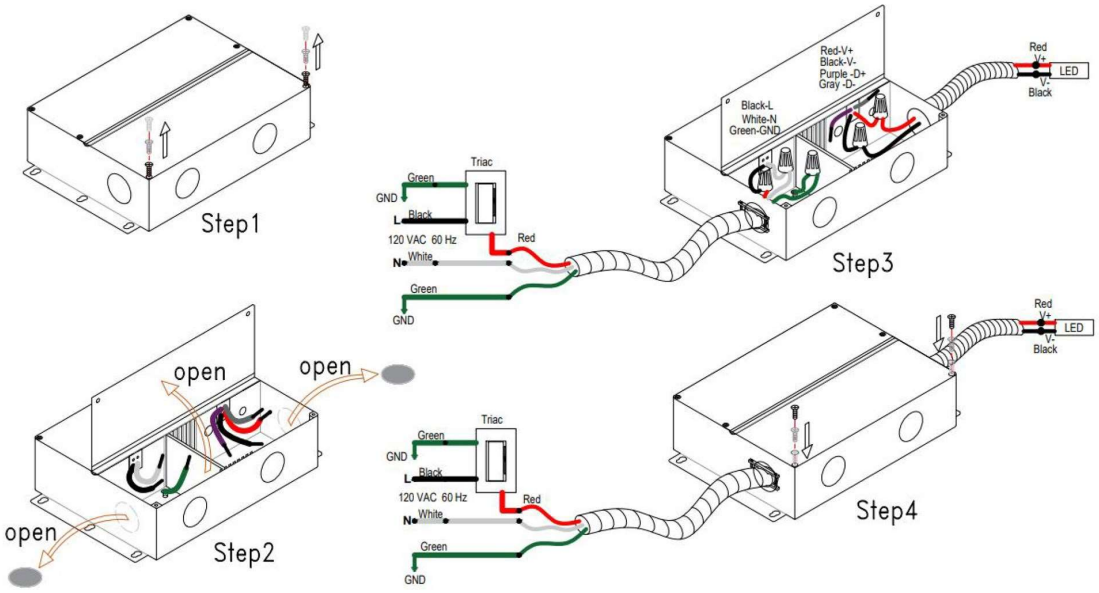

0-10V WIRING DIAGRAM AND FOR PWM SWITCH ON

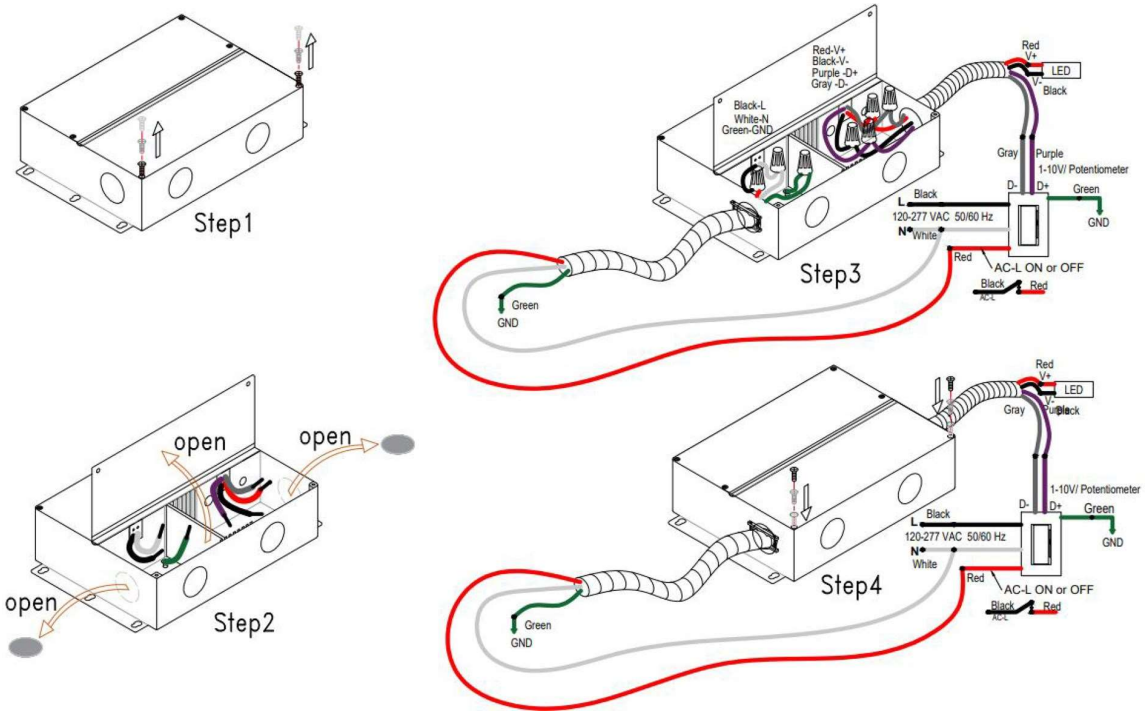

Natech Industrie
1995 Francis Hughes, Laval, QC, H7S 2G2 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, service@natechlighting.com

This specification is valid as of 2022-10 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.