



Project :	Date :
Cat. No. :	Type :
Notes :	Volts :

Sensitive passive infrared human body detection sensor that will activate the 12 or 24 volts led lights from between 5 to 8 meters and with adjustable delay time 3 to 10 minutes.

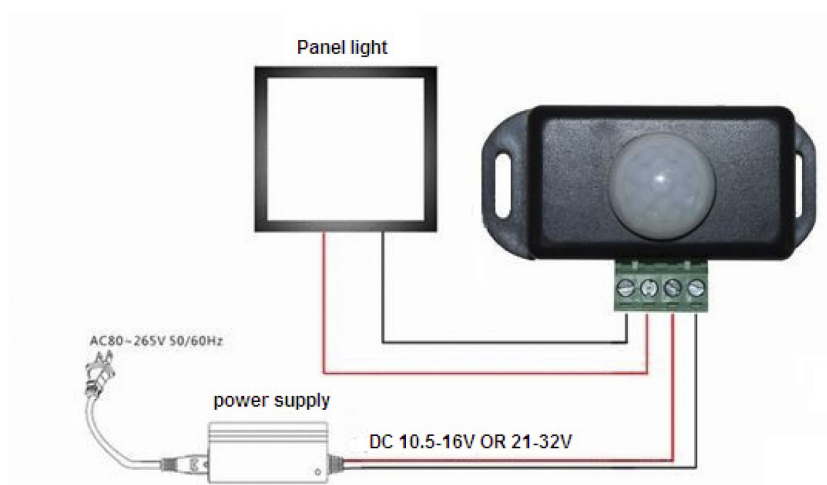

Input voltage:	12VDC - 24VDC
Output current:	Max 6A
Output :	1 channel
Motion detection sensor distance:	5 ~ 8 meters
delay time:	3 - 10 minutes (adjustable)
Motion detection sensor angle:	60 °
Working temp:	-20°C-60°C
Output power:	12V- 96W 24V- 192W

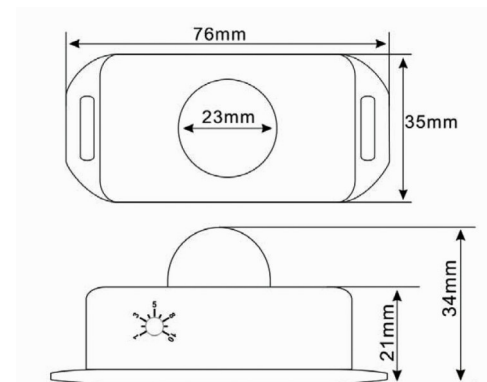

Natech Industrie

3154 boulevard Industriel, Laval, QC, H7L 4P7 T: (450) 629-1169, F: (450) 629-1168, www.natechlighting.com, info@natechlighting.com

This specification is valid as of 2015-09 and is subject to change without notice. Please confirm with the manufacturer before placing an order.
Copyright 2014 Natech Industrie. All rights reserved.